

## Thermoelectric Cooler

### STONECOLD


#### Performance Specifications

Hot Side Temperature (°C)	25°C	50°C
Qmax (Watts)	85	96
Delta Tmax (°C)	66	75
I <sub>max</sub> (Amps)	10.5	10.5
V <sub>max</sub> (Volts)	15.2	17.4
Module Resistance (Ohms)	1.08	1.24




Performance curves on page 2

# STONECOLD

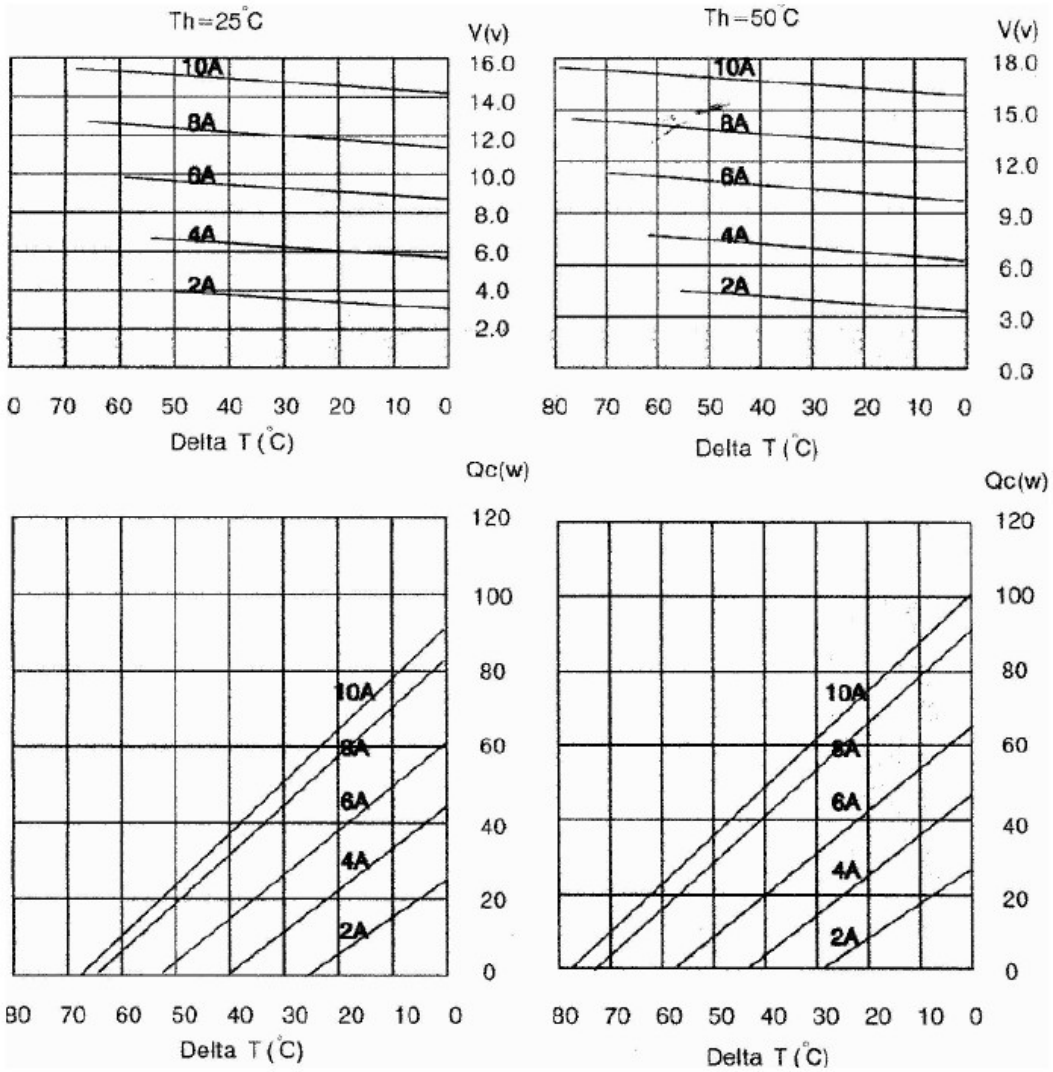

# STONECOLD

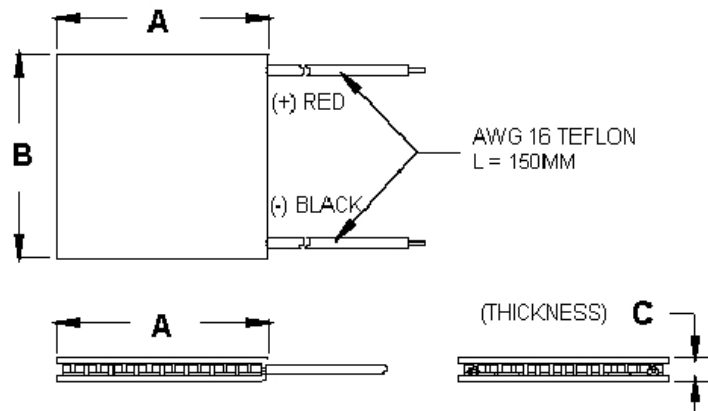

Ceramic Material: Alumina ( $Al_2O_3$ )  
Solder Construction: 138°C, Bismuth Tin (BiSn)

## Size table:

A	B	C
40	40	3.3

## Operating Tips

- Max. Operating Temperature: 138°C
- Do not exceed  $I_{max}$  or  $V_{max}$  when operating module.
- Life expectancy: 200,000 hours
- Failure rate based on long time testings: 0.2%.