


# TIP35C TIP36B/TIP36C COMPLEMENTARY SILICON HIGH POWER TRANSISTORS


 STMicroelectronic PREFERRED SALESTYPES

#### DESCRIPTION

The TIP35C is a silicon Epitaxial-Base NPN transistor mounted in TO-218 plastic package. It is intented for use in power amplifier and switching applications.

The complementary PNP type is TIP36C. Also TIP36B is a PNP type.

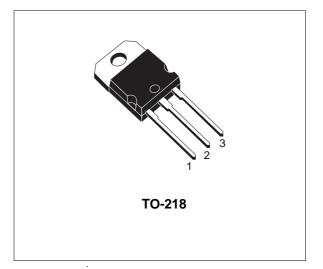

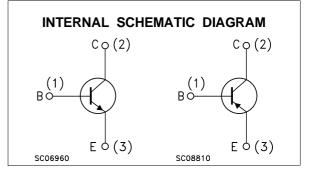

#### **ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter	Value			Unit
	N			TIP35C	
		PNP	TIP36B	TIP36C	
V <sub>CBO</sub>	Collector-Base Voltage (I <sub>E</sub> = 0)		80	100	V
V <sub>CEO</sub>	Collector-Emitter Voltage $(I_B = 0)$		80	100	V
Vebo	Emitter-Base Voltage $(I_C = 0)$		5		V
lc	Collector Current		25		А
Ісм	Collector Peak Current		50		А
IB	Base Current		5		Α
P <sub>tot</sub>	Total Dissipation at $T_{case} \le 25 \ ^{o}C$		125		W
T <sub>stg</sub>	Storage Temperature		-65 to 150		°C
Tj	Max. Operating Junction Temperature		150		°C

For PNP types voltage and current values are negative.

### THERMAL DATA

R <sub>thj-case</sub> Thermal Resistance Junction-case Max	1 °C/W
--	--------

## **ELECTRICAL CHARACTERISTICS** ( $T_{case} = 25 \, {}^{\circ}C$ unless otherwise specified)


Symbol	Parameter	Test Condit	ions	Min.	Тур.	Max.	Unit
I <sub>CEO</sub>	Collector Cut-off Current ( $I_B = 0$ )	V <sub>CE</sub> = 60 V				1	mA
I <sub>EBO</sub>	Emitter Cut-off Current $(I_C = 0)$	V <sub>EB</sub> = 5 V				1	mA
I <sub>CES</sub>	Collector Cut-off Current (V <sub>BE</sub> = 0)	$V_{CE}$ = Rated $V_{CEO}$				0.7	mA
$V_{CEO(sus)}^{\star}$	Collector-Emitter Sustaining Voltage (I <sub>B</sub> = 0)	I <sub>C</sub> = 30 mA for <b>TIP36B</b> for <b>TIP35C/36C</b>		80 100			V V
h <sub>FE</sub> *	DC Current Gain	I <sub>C</sub> = 1.5 A I <sub>C</sub> = 15 A	V <sub>CE</sub> = 4 V V <sub>CE</sub> = 4 V	25 10		50	
V <sub>CE(sat)</sub> *	Collector-Emitter Saturation Voltage	I <sub>C</sub> = 15 A I <sub>C</sub> = 25 A	I <sub>B</sub> = 1.5 A I <sub>B</sub> = 5 A			1.8 4	V
$V_{BE(on)}^{*}$	Base-Emitter Voltage	I <sub>C</sub> = 15 A I <sub>C</sub> = 25 A	V <sub>CE</sub> = 4 V V <sub>CE</sub> = 4 V			2 4	V V
f <sub>T</sub>	Transition Frequency	$I_{C} = 1 \text{ A}$ $V_{CE} = 10 \text{ V}$	f = 1 MHz	3			MHz
h <sub>fe</sub>	Small Signal Current Gain	I <sub>C</sub> = 1 A V <sub>CE</sub> = 10 V	f = 1 KHz	25			

\* Pulsed: Pulse duration =  $300 \ \mu$ s, duty cycle  $\le 2 \ \%$ For PNP types voltage and current values are negative.

57

DIM.		mm			inch	
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
А	4.7		4.9	0.185		0.193
С	1.17		1.37	0.046		0.054
D		2.5			0.098	
Е	0.5		0.78	0.019		0.030
F	1.1		1.3	0.043		0.051
G	10.8		11.1	0.425		0.437
Н	14.7		15.2	0.578		0.598
L2	-		16.2	-		0.637
L3		18			0.708	
L5	3.95		4.15	0.155		0.163
L6		31			1.220	
R	-		12.2	-		0.480
Ø	4		4.1	0.157		0.161



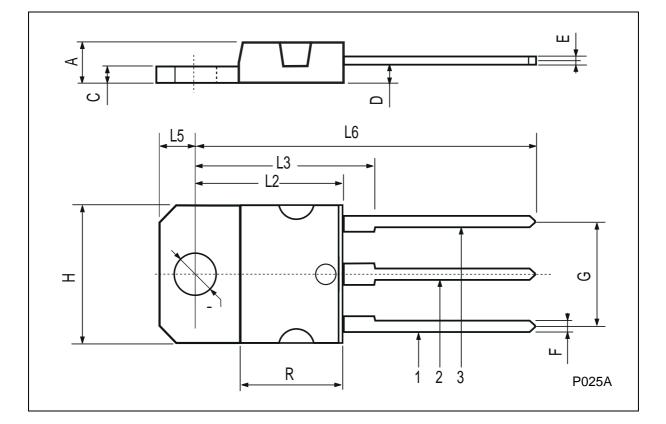

**57** 

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics. The ST logo is a trademark of STMicroelectronics.

All other names are the property of their respective owners.

 $\ensuremath{\textcircled{}^{\circ}}$  2003 STMicroelectronics – All Rights reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

http://www.st.com

57